

7929 Lincoln Ave. Riverside, CA 92504
Phone: 951.689.ICON | Fax: 951.689.1016

PART #	DESCRIPTION
22070	20-UP JT REAR SWAY BAR LINK KIT

COMPONENTS INCLUDED	
(4) 169003 SLEEVE .750 X .510 X .250 (2) 197016 3/4" HEX BAR END LINK 9.25" LONG	(2) 295504 1/2-20 ROD END LEFT HAND SHANK RIGHT HAND STUD (2) 295512 1/2-20 ROD END
HARDWARE INCLUDED	
(4) 605330 1/2 FLAT WASHER (2) 605350 1/2-20 C-LOCK NUT	(2) 605355 1/2-20 JAM NUT THIN (2) 605356 1/2-20 LEFT HAND JAM NUT THIN
TOOLS REQUIRED	
TORQUE WRENCH 6MM ALLEN 18MM SOCKET / WRENCH	5/8" SOCKET / WRENCH 3/4" SOCKET / WRENCH
TECH NOTES	
<p>1. THE SWAY BAR LINKS COME PRESET AT ICON'S RECOMMENDED LENGTH TO PROPERLY WORK WITH ICON SUSPENSION SYSTEMS. CUSTOM SUSPENSION CONFIGURATIONS MAY REQUIRE ADDITIONAL ADJUSTMENT.</p> <p>2. IF ADJUSTING THE LINKS, DO NOT EXCEED 13.00" OF SWAY BAR LENGTH (EYE TO EYE).</p>	



WARNING!
<p>** READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION! IF THESE INSTRUCTIONS ARE NOT PROPERLY FOLLOWED SEVERE FRAME, SUSPENSION AND TIRE DAMAGE MAY RESULT TO THE VEHICLE!</p> <p>** ICON VEHICLE DYNAMICS RECOMMENDS THAT YOU EXERCISE EXTREME CAUTION WHEN WORKING UNDER A VEHICLE THAT IS SUPPORTED WITH JACK STANDS.</p> <p>** ICON VEHICLE DYNAMICS RECOMMENDS ALL INSTALLATION TO BE PERFORMED BY A PROFESSIONAL SHOP/SERVICE TECHNICIAN. PRODUCT FAILURE CAUSED BY IMPROPER INSTALLATION WILL NOT BE COVERED UNDER ICON'S WARRANTY POLICY.</p>

INSTALLATION

1. These sway bar links can be installed with the vehicle on the ground at ride height or with the suspension fully extended.
2. Remove the rear sway bar links using an 18mm & 6mm allen. [FIGURE 1]

FIG.1



3. The sway bar links come preassembled by ICON and are preset to the recommended length. If using in a custom application, adjust as needed.


4. Mount the sway bar link with an opened eyelet on the passenger side using the supplied spacers and the factory bolt. [FIGURE 2]

FIG.2



5. Mount the stud of the rod end to the sway bar using 1/2" washers on both sides and torque nut to 50 ft-lbs using a 5/8" and 3/4" socket/wrench. [FIGURE 3]

FIG.3

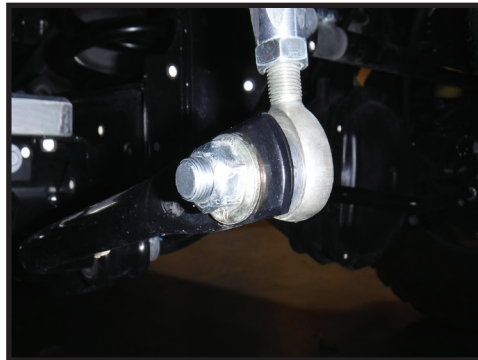

VERIFY ALL FASTENERS ARE PROPERLY TORQUED BEFORE DRIVING VEHICLE.

RETORQUE ALL NUTS, BOLTS AND LUGS AFTER 100 MILES AND PERIODICALLY THEREAFTER.

ICON VEHICLE DYNAMICS LIMITED LIFETIME WARRANTY

ICON Vehicle Dynamics warrants to the original retail purchaser who owns the vehicle on which the product was originally installed. ICON Vehicle Dynamics does not warrant the product for finish, alterations, modifications and/or installation contrary to ICON Vehicle Dynamics instructions. ICON Vehicle Dynamics products are not designed, nor are they intended to be installed on vehicles used in race applications, for racing purposes or for similar activities. (A "race" is defined as any contest between two or more vehicles, or a contest of one or more vehicles against the clock, whether or not such contest is for a prize). This warranty does not include coverage for police or taxi vehicles, race vehicles, or vehicles used for government or commercial purposes. Also excluded from this warranty are sales outside of the United States of America and Canada.

ICON Vehicle Dynamics' obligation under this warranty is limited to the repair or replacement, at ICON Vehicle Dynamics' discretion, of the defective product. Any and all costs of removal, installation or re-installation, freight charges and incidental or consequential damages are expressly excluded from this warranty. Items that are subject to wear are not considered defective when worn and are not covered.

ICON Vehicle Dynamics components must be installed as a complete kit as shown in our current application guide. Any substitutions or exemptions of required components will immediately void the warranty. Some finish damage may happen to parts during shipping and is not covered under warranty.

This warranty is expressly in lieu of all other warranties expressed or implied. This warranty shall not apply to any product that has been improperly installed, modified or customized subject to accident, negligence, abuse or misuse.